

SIGN MODULE LINEA-22



PRODUCT FEATURES

- New lens design to get uniform lighting
- High efficiency module
- View angle: 155°
- Protection class IP 66
- Normal lifetime up to 50,000 h
- Warranty – 5 Years

AREAS OF APPLICATION

- Signage & illuminated advertising
- Best for 50 - 200 mm depth channel letters

PHOTO-METRICAL DATA

Colour temperature	3000K, 6500K, 8000K, Red
Colour rendering index Ra	≥70
Luminous flux per module chain	10,200 Lm
Luminous flux per LED module	102 Lm
Luminous efficacy	170 Lm/W
Standard deviation of colour matching	≤4 sdcn


TECHNICAL DATA

Product name	Linea 22
Module size	46 x 15 x 8 mm
Number of modules per chain	100
Distance of module (wire)	65 mm
Ambient temperature t_a	25°C
Max temperature on modules t_c	60°C

ELECTRICAL DATA

Nominal voltage	24V
Nominal wattage per chain	60 W
Nominal wattage per LED module	0.6 W
Type of voltage	DC
Operating environment (t_a)	-25°C to +60°C
Storage temperature range (t_s)	-40°C to +85°C

DIMENSIONS (2D DRAWING)

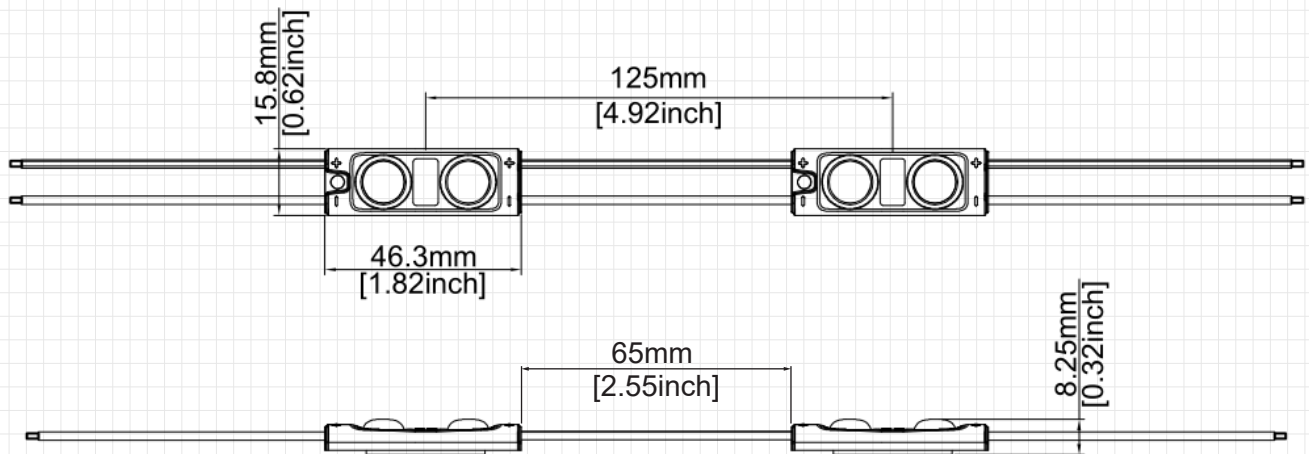

PLEASE NOTE

- The power supply cable should meet the actual maximum current and power specifications
- All the end point of wires should be waterproof
- Pay attention to the maximum number of connections, overloading can be hazardous
- All the power supply must have the corresponding certification like BIS
- Our company reserves the right of final interpretation of all specifications and data
- The above is subject to change without notice