

BACKLIT BAR



PRODUCT FEATURES

- Anti glare diamond lens
- Low light decay
- Beam characteristics: 120° x 150°
- Mounting clips & connectors
- Protection class of LED bar: IP 65
- Aluminum PCB for better heat dissipation
- Warranty - 5 Years

AREAS OF APPLICATION

- Replacement of tube lights in flex & vinyl signage
- Stretch ceiling
- Fabric light box


TECHNICAL DATA

Product name	Linea light box bar
Colour	10000K, 7500K, 6500K, 3000K
Watt	12 W
Voltage	24 V
Width (mm)	17 mm
Luminous Efficacy	115 Lm/W
Lumens	1340 Lm


ENVIRONMENTAL & APPLICATION CONDITIONS

Life Span	Up to 50,000 h
Working Temperature	-40°C-50°C
Store Temperature	-50°C-60°C

DIMENSIONS (2D DRAWING)

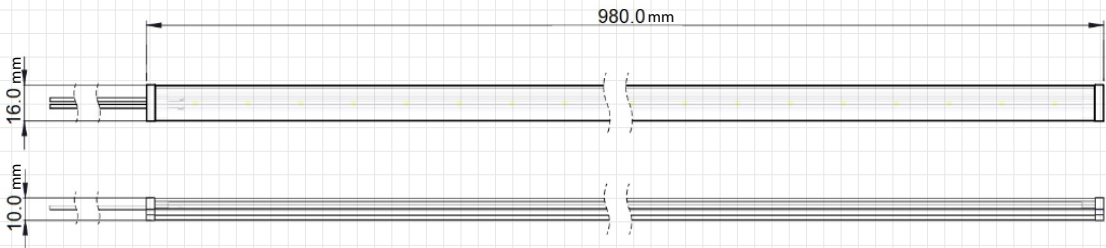

PRODUCT DRAWING

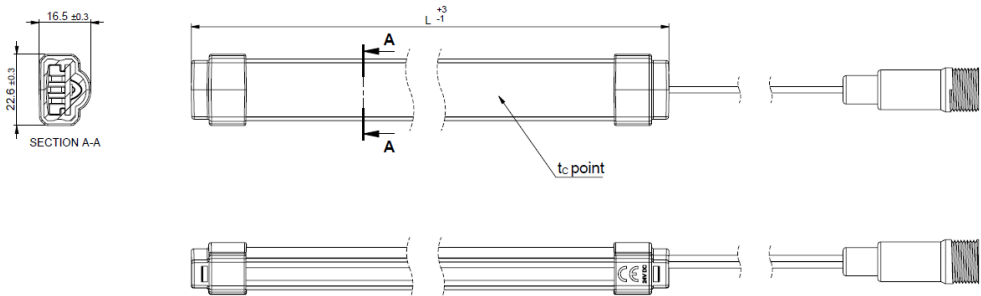

ASSEMBLY GUIDE INFORMATION

1

Ø3mm

2

DW-G1-CLIP-Metal
EAN 4062172017879
ST3.5

3

Model / 产品型号 / 產品型號	Clip Qty. per model / 卡扣使用数量 / 卡扣使用數量
DW1000-G1-06	2 pcs
DW1000-G1-12	3 pcs
DW1000-G1-15	3 pcs

4

"click"

"click"

5

a. Multiple IP65 connector can be only cut before installation based on requirements.
多头IP65连接器只能在安装前按照需求剪切。
多头IP65连接器只能在安装前按照需求剪切。
b. After cut, please make sure wiring not be shorted, and additional IP65 protect needed to avoid whole system IP protect failure.
剪切后，需要确保电线不会被短路，同时需要采取额外的措施保护被剪切的接头位置，以防整个系统的IP防护性能失效。
剪切后，需要确保电线不会被短路，同时需要采取额外的措施保护被剪切的接头位置，以防整个系统的IP防护性能失效。

6

Multiple IP65 Connector / 多头IP65连接器 / 多头IP65连接器	EAN	Max. apply to / 最大连接数量 / 最大连接数量
DW-G1-MC15	4062172017817	15 pcs
DW-G1-MC25	4062172017848	25 pcs

7

8

a... ? mm
b... ? mm
c... ? mm

$n = \frac{a}{d}$

9

1x 2x 3x ... nx

IP65